


## ■ YJF-FB

### Features:


- Variable Speed with low noise
- High Torque for low speed
- Impedance Protected or Thermal Protected

### Applications:

- Commercial Grills, Ovens, Rotisseries, Water Treatment Equipment
- Peristaltic Pump, Household Appliances etc.

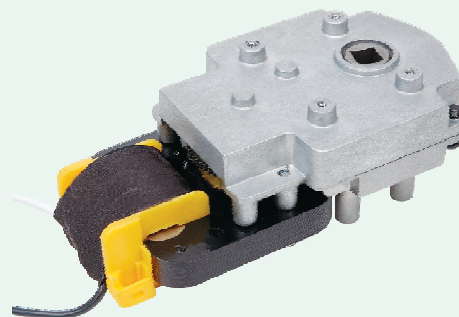

### ■ Drawing

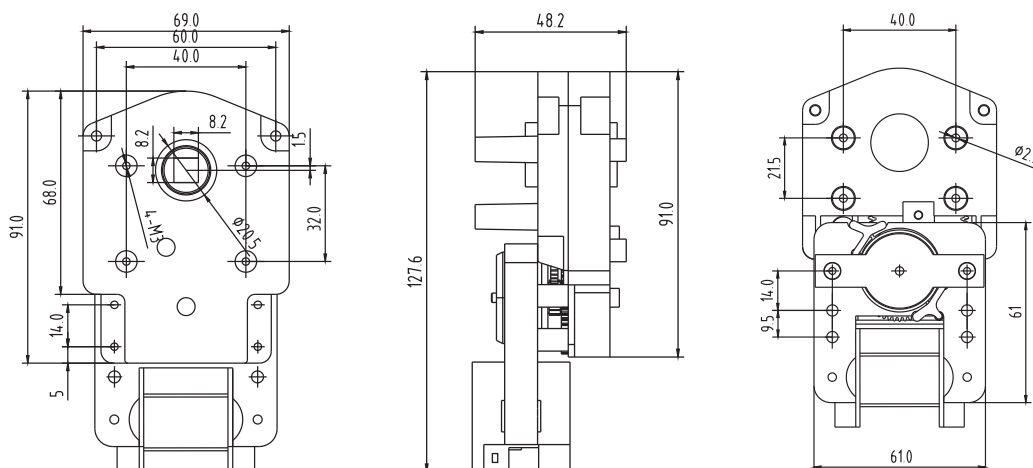

### ■ Specification

ITEM	DATA	
Rated Voltage (V)	110	220
Rated Frequency (Hz)	50/60	
Input Power (W)	10-16	
Output Power (W)	2-3	
Noise (db)	<55	
Rotate direction	CW0 RC CW (uncontrollable)	
Model	YJF61	

### ■ Safty

ITEM	DATA
Insulation resistance	DC500V 100M Ohms
Insulation str.	AC1500V 50Hz/min(220V motor)
Insulation class	E(105C)/B(130C)
Environment	Temp:-10 C~+40 C / Humidity:<85
Protection	Impedance or overheating protection
Certification	

### ■ Speed&Torque

Speed(RPM)	Working style	5																	
Torque (kgf.cm / lb-in)	S1 continuous	35/30.5																	
	S2 15 minutes																		
	S2 5 minutes																		

- Above datas are from motors under 50Hz and height of stator is 40mm. If under 60Hz, SpeedX1.2, Torque /1.2
- Other speed and torque needed, please contact our sales department

- For more detailed information, feel free to contact us.  
Tel:86-574-88269898 Fax:86-574-56664788 export@fengtech.com